ELLENSBURG FENCE CO.

Ellensburg Fence Co. L.L.C.

PO Box 898 Ellensburg, WA 98926

Phone # 509-929-4090

chris@ellensburgfence.com

Estimate

Date	Estimate #				
4/23/2014	1135				

Nam	e / Address	
TAATA	County Colid Mante	notice by t

Kittitas County Solid Waste Patti Johnson 925 Industrial Way Ellensburg, WA 98926

Project
-0107010311-000-01000-001983/70000

Description	Qty	Cost	Total ·
KITTITAS COUNTY SOLID WASTE MAIN OFFICE Product supplied, installed, and job cleaned up. 6' + Barb Wire, Privacy Link Chain link fence. 2 7/8" sch 40 Terminal Posts, 2 3/8" Sch 40 Line Posts, and 1 5/8" sch 40 top rail and braces.	1 173	0.00 19.25	0.00T 3,330.25T
Product supplied, installed, and job cleaned up. 6' + Barb wire, 9 ga Galvanized chain link fence. 2 7/8" Terminals, 2 3/8" Line Posts, and 1 5/8" top rail. Fence braced and trussed for strength	238	14.70	3,498.60T
Fence line must be cleared of brush and/or stored items. Two feet will be needed clear on the wire side (outside) of the fence.	1	0.00	0.00T
Customer advised that he/she is the owner, or agent of the owner, of the property. Customer assumes full responsibility for location of the fence, and agrees to, at customer's sole expense, defend and hold ELLENSBURG FENCE CO. LLC harmless with respect to property line disputes, claims of damage to underground utilities, and any other claims brought on account of the work described above. CUSTOMER AGREES TO PAY FOR FENCE UPON COMPLETION. Customer agrees that in the event collection of customer's payment obligation hereunder is placed in the hands of an attorney, customer shall pay attorney's fees and court costs.	1	0.00	0.00T

 Quote valid for 30 days
 Subtotal
 \$6,828.85

 Sales Tax (8.0%)
 \$546.31

Total \$7,375.16

Signature



FENCING & AWNING, INC.
4810 BEAUCHENE ROAD
MOXEE, WA 98936-9734
509-248-5117/800-310-0805 FX 509-248-6070
FENCIAI165CC

9	CONTRACT OF THE PERSON	-	4	-	-	400	-		AND STREET, ST	4	STATE OF THE PARTY	-	-	-	49 (8)	-		400	APPROX DE	THE REAL PROPERTY.
					6			A F	ND					1	1		2			
	T			v				24	AL	W				71.	W			-		_

Page 1 04/29/2014

Customer Information:	Job Information:
KITTITAS CITY SOLID WASTE ATTN: BOBBY 1-509-899-4009 925 INDUSTRIAL WAY ELLENSBURG, WA 98926	
Notes:	
THE PRICE AT THE BOTTOM OF THIS PAGE IS FOR F&A TO FURNISH & INSTALL A COMPLETE CHAIN LINK FENCE AS PER THE ATTACHED PLANS & SPECS. ALSO WE BASED OUT BID ON PAYING THE EMPLOYEES WASHINGTON STATE PUBLIC WORKS WAGES WHILE THEY ARE ON SITE INSTALLING THE FENCE, THE \$80.00 WAGE FILLING FEE IS ALSO INCLUDED IN THIS PRICE. TERMS & CONI	OTTTONS

IF ANY SUPPLIER OF MATERIALS USED IN YOUR CONSTRUCTION PROJECT OR ANY EMPLOYEE OF THE CONTRACTOR OR SUBCONTRACTOR IS NOT PAID BY THE CONTRACTOR OR SUBCONTRACTOR ON OUR JOB, YOUR PROPERTY MAY BE LIENED TO FORCE PAYMENT. IF YOU WISH ADDITIONAL PROTECTION, YOU MAY REQUEST FAR TO PROVIDE YOU WITH A "LIEN RELEASE" DOCUMENT. PAYMENTS ARE DUE UPON COMPLETION OF THE CONTRACT UNLESS STATED OTHERWISE HEREIN. ALL PAYMENTS NOT RECEIVED WHEN DUE WILL BE ASSESSED A LATE CHARGE OF 1.5% PER MONTH ON THE UNPAID BALANCE. THE CUSTOMER WILL BE RESPONSIBLE FOR ALL COLLECTION COSTS INCLUDING A REASONABLE ATTORNEY'S FEE. ALL CREDIT CARD PURCHASES WILL BE PAYMENT ON ORDER. IF YOU DECIDE TO PAY WITH CREDIT CARD AND DO NOT WANT TO PAY 100% UP FRONT A 3% SERVICE FEE WILL BE ADDED TO YOUR UNPAID BALANCE. ANY ACTION ARISING OUT OF THIS CONTRACT SHALL BE IN YAKIMA COUNTY, STATE OF WASHINGTON. CHANGES MADE TO THE CONTRACT WILL BE CHARGED OR CREDITED AT THE CURRENT ESTABLISHED RATES. FLAW WILL NOTIFY ALL OWNERS OF UNDERGROUND UTILITIES THROUGH THE "1-NUMBER LOCATOR-SERVICE" OR AS OTHERWISE PROVIDED BY WASHINGTON STATE LAW ROW 19.122.030. THE CUSTOMER WILL HAVE TO LOCATE ALL UNDERGROUND OBJECTS THAT ARE NOT A CONSEQUENCE OF FEA'S FALLURE TO FULFILL ITS OBLIGATION UNDER THIS LAW. THE FENCE LINES WILL BE ESTABLISHED BY THE CUSTOMER, BY STAKING THE TERMINAL POSTS BEFORE FEA'S CREW ARRIVES ON THE JOB SITE. ALL MATERIALS WILL REMAIN THE PROPERTY OF FEA UNTIL PAID FOR ANY STRIKES, ACCIDENTS, MATERIAL SHORTAGES AND ANY OTHER CAUSE BEYOND OUR CONTROL EXCUSES DELAY IN THE PERFORMANCE OF THIS CONTRACT. THE CUSTOMER UNDERSTANDS THAT THE ACCEPTED CONTRACT IS NOT SUBJECT TO CANCELLATION. ALL TERMS AND CONDITIONS OF THIS CONTRACT. THE CUSTOMER UNDERSTANDS THAT THE ACCEPTED CONTRACT IS NOT SUBJECT TO CANCELLATION. ALL TERMS AND CONDITIONS OF THIS CONTRACT THAT THEY DO NOT PRESENTLY HAVE WILL BE ADDED TO THE CONTRACT. COMPACTION OF THE EARTH IS THE RESPONSIBILITY OF THE CUSTOMER. THIS OFFER, UNLESS OTHERWISE STATED, DOES NOT INCLUDE BAY CLEARING, GRADING, OR

		Approved & Accepted for Custom	er:
Bid Amount:	\$ 8185.42		
Total Sales Tax:	\$ 654.83	Customer	Date
Total Bid Amount:	\$ 8840.25	Customer	Date
Down Payment:	\$ 2 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	Accepted for FENCING & AWNING,	INC.:
Balance Due:	\$	A Sole	
		Salesper	Date



FENCING & AWNING, INC. 4810 BEAUCHENE ROAD MOXEE, WA 98936-9734 509-248-5117/800-310-0805 FX 509-248-6070

CHAINLINK FENCE SPECIFICATION

FABRIC: 48" 9 GA (2" MESH) KK CHAIN LINK WIRE.

1-5/8" O.D. SCH 40 PIPE, 2.27 lbs. per foot. Top rail 21' in length, joined with 1-5/8" P.S. (6" LONG) SLEEVE. TOP RAIL:

LINE POST: 1-7/8" O.D. SCH 40 PIPE POST, 2.72 lbs. per foot. Line posts

set 10' on center maximum spacing. Concrete footing: 12"

diameter, 24" depth.

2-3/8" O.D. SCH 40 PIPE POST, 3.65 lbs. per foot. Concrete TERMINAL POST:

footing: 12" diameter, 24" depth.

TENSION WIRE: 7 GA (1100/RL) SPRING STEEL (COMMERCIAL GALV) TENSION WIRE

attached to bottom of fence fabric with 12-1/2 GA. STEEL (224/LB) HOG RING spaced 24" (approximatly) ON CENTER.

REG. BRACE BAND & GALV. CARRIAGE BOLT, D.C. ALUM. RAIL END, DURA TOP EYE TOP, D.C. ALUM. CAP, 3/16" X 5/8" TENSION BAR, REG. TENSION BAND & GALV. CARRIAGE BOLT. FITTINGS:

6-1/2" 9 GA. ALUM. W/ HOOK TIE WIRE spaced 15" (approximatly) TIE WIRE:

ON CENTER for line posts & 24" (approximatly) ON CENTER for

rails.

READY MIX (OUT OF TOWN) CONCRETE. POST FOOTING:

FENCE INSERTS: 48" BOTTOM-LOCKING SLAT (8.5/FT) FENCE INSERTS.



FENCING & AWNING, INC. 4810 BEAUCHENE ROAD MOKEE, WA 98936-9734 509-248-5117/800-310-0805 FX 509-248-6070

CHAINLINK FENCE SPECIFICATION

FABRIC: 72" 9 GA (2" MESH) KT CHAIN LINK WIRE.

TOP RAIL: 1-5/8" O.D. SCH 40 PIPE, 2.27 lbs. per foot. Top rail 21' in

length, joined with 1-5/8" P.S. (6" LONG) SLEEVE.

LINE POST: 1-7/8" O.D. SCH 40 PIPE POST, 2.72 lbs. per foot. Line posts

set 10' on center maximum spacing. Concrete footing: 12"

diameter, 24" depth.

TERMINAL POST: 2-3/8" O.D. SCH 40 PIPE POST, 3.65 lbs. per foot. Concrete

footing: 12" diameter, 36" depth.

BRACING: Terminal posts braced and trussed to the nearest line post

with 1-5/8" O.D. SCH 40 PIPE and STEEL 3/8" TRUSS ROD & IND.

TRUSS ROD TIGHTENER.

TENSION WIRE: 7 GA (1100/RL) SPRING STEEL (COMMERCIAL GALV) TENSION WIRE

attached to bottom of fence fabric with 12-1/2 GA. STEEL (224/LB) HOG RING spaced 24" (approximatly) ON CENTER.

BARBED WIRE: 3 strands of 12-1/2 GA(1320/RL) 4 PT. (IMPORT) BARB WIRE on

45 DEG. P.S. BARB WIRE ARM.

FITTINGS: REG. BRACE BAND & GALV. CARRIAGE BOLT, D.C. ALUM. RAIL END, 45

DEG. P.S. BARB WIRE ARM, D.C. ALUM. CAP, 3/16" X 5/8" TENSION

BAR, REG. TENSION BAND & GALV. CARRIAGE BOLT.


TIE WIRE: 6-1/2" 9 GA. ALUM. W/ HOOK TIE WIRE spaced 15" (approximatly)

ON CENTER for line posts & 24" (approximatly) ON CENTER for

rails.

POST FOOTING: READY MIX (OUT OF TOWN) CONCRETE.

FENCE INSERTS: 48" BOTTOM-LOCKING SLAT (8.5/FT) FENCE INSERTS.

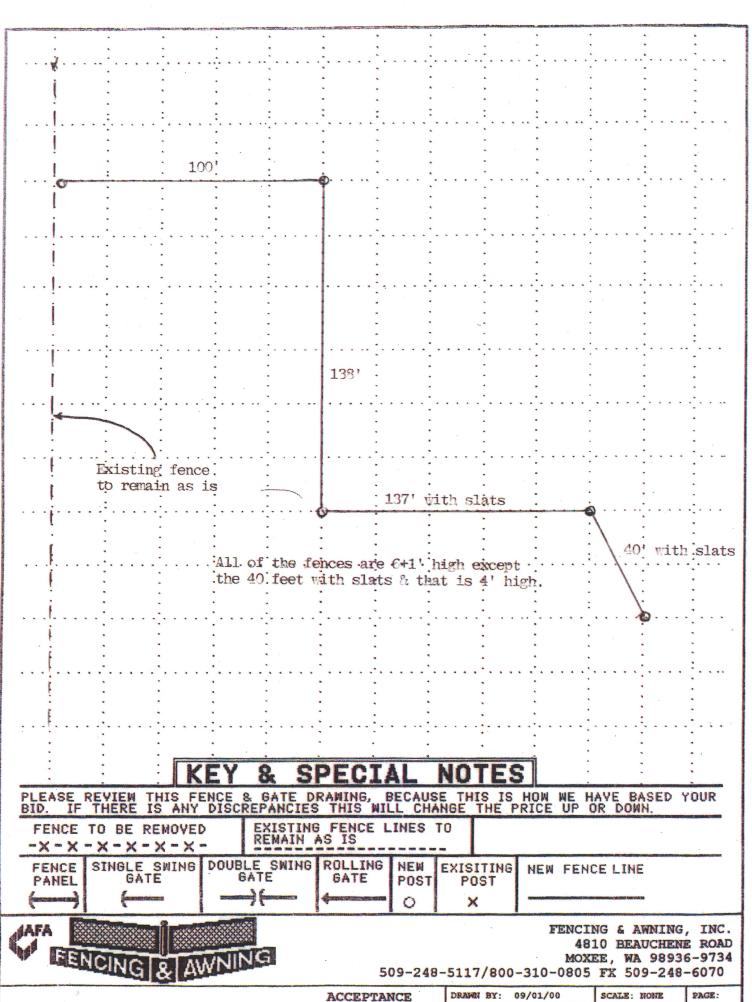

 DRAWN BY:
 09/01/00
 SCALE:
 NOME
 PAGE:

 REVISED:
 02/11/03
 FILE:
 DRAW
 3 of 3