

## **APPENDIX A**

## **TEST PIT LOGS**

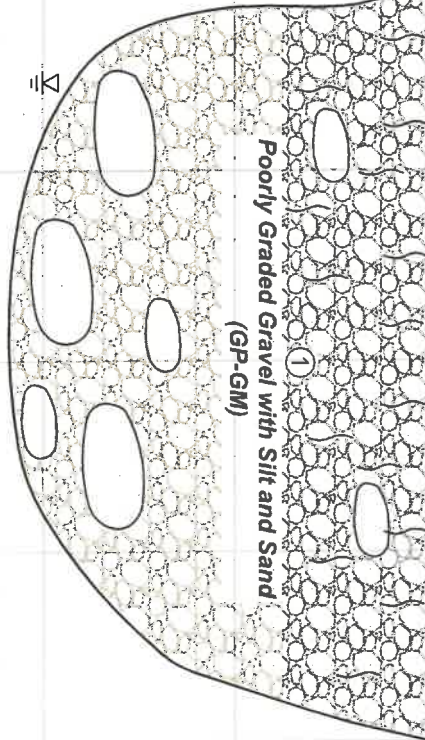
☎ : (509) 469-3068  
📠 : (509) 460-3070  
🌐 : www.baertesting.com



1106 Ledwith Ave.  
Yakima, WA 98902

## LOG OF TP-1

JOB NO: 24-016 EX. DATE: 2/2/24 LOCATION: Northwest of Building  
PROJECT: Johnson Barn - 11810 Manastash Road, Kittitas County, Washington  
Logged By: BH GPS Coordinates: N 46.9651404 E -120.7196181


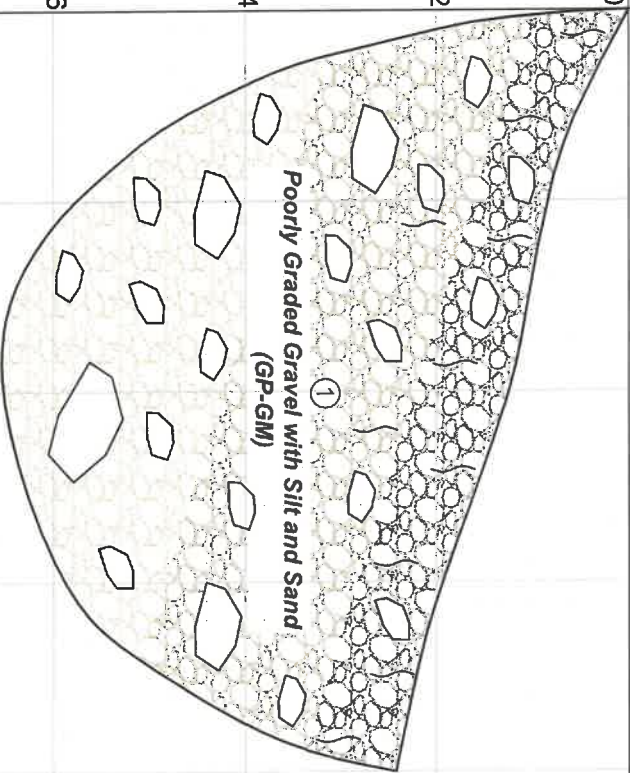
SOIL DESCRIPTION		Ground Water		Blow Counts ASTM STP399	Samples	Depth, Ft.	Sketch of West Pit Side	Surface Elevation: Horizontal Distance in Feet
<b>① 0 - 4.5'</b> Dense to very dense, dark brown to brown, <b>Poorly Graded Gravel with Silt and Sand (GP-GM)</b> ; Moist to wet; rounded gravel, some cobbles, and few boulders, maximum diam. 17 inches; fine to coarse sand; nonplastic silt; organics (roots) near the surface (18 inches); clasts horizontally aligned; brown below 1.5 feet.				* 50% 1.5"	S-1	0		0
				* 14- 50% 1"		2		2
						4		4
						6		6
						8		8
						10		10
						12		12
Test Pit Terminated at ±4.5 feet Groundwater at ±4.0 feet								
*Blow counts elevated due to oversize gravels								

## Pipe

1106 Ledwich Ave.  
Yakima, WA 98902

## LOG OF TP-3

JOB NO: 24-016 EX. DATE: 2/2/24 LOCATION: Southwest of Building  
PROJECT: Johnson Barn - 11810 Manastash Road, Kittitas County, Washington  
Logged By: BH GPS Coordinates: N 46.9648453 E -120.7195963

SOIL DESCRIPTION				Sketch of _____ West _____ Pit Side _____ Surface Elevation:	
Surface Description:	Ground Water	Blow Counts ASTM STP399	Samples	Depth, Ft.	Horizontal Distance in Feet
<b>① 0 - 7.0'</b> Dense to very dense, dark brown, brown, and light brown, <i>Poorly Graded Gravel with Silt and Sand (GP-GM)</i> ; Moist to dry; angular gravel, some cobbles, and few boulders, maximum diam. 18 inches; fine to coarse sand; nonplastic silt; organics (roots) near the surface (12 inches); brown below 1 foot; light brown and dry below 3 feet.	None Observed	* 50/ <sub>1"</sub> * 50/ <sub>0.5"</sub>			Test Pit Terminated at ±7.0 feet No Groundwater Encountered