




POLE INFORMATION	
POLE #	2
POLE TAG	NEED REFIELD
POLE OWNER	NC
LASHING	NC
LATITUDE	47.1015303
LONGITUDE	-120.7024889
NEUTRAL	2ND
CATV COM	
TELCO COM	
PROP. ATTACH	

POLE INFORMATION	
POLE #	1
POLE TAG	KX823
POLE OWNER	PSE
LASHING	NC
LATITUDE	47.1011913
LONGITUDE	-120.7027892
NEUTRAL	25'-4"
2ND	-
CATV COM	-
TELCO COM	-
PROP. ATTACH	-

POLE INFORMATION	
POLE #	5
POLE TAG	264455-195000
POLE OWNER	PSE
LASHING	NC
LATITUDE	47.1007467
LONGITUDE	-120.7016628
NEUTRAL	24'-2"
2ND	24'-2"
CATV COM	
TELCO COM	
PROP. ATTACH	

- (A) PROPOSED LIGHTCURVE
24CT FIBER NEW CONTACT
- (B) PROPOSED LIGHTCURVE
4CT FIBER NEW CONTACT

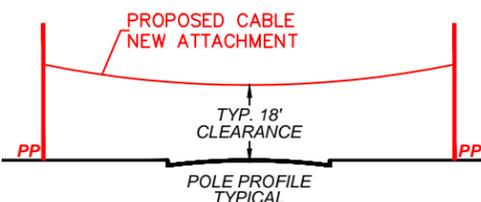

MATCH TO STA.77+94 SHEET 2 OF 14

MATCH TO STA.03+32 SHEET 3 OF 14


CUSTOMER INFORMATION
 ENGINEERING PROGRAM MANAGER
 NAME: HARSH PANCHAL
 PHONE: 630-433-0518
 EMAIL: HARSHP@UTILITIESONE.COM
 WEBSITE: WWW.UTILITIESONE.COM

ENGINEERING CONTACT
 ENGINEERING PROGRAM MANAGER
 NAME: HARSH PANCHAL
 PHONE: 630-433-0518
 EMAIL: HARSHP@UTILITIESONE.COM
 WEBSITE: WWW.UTILITIESONE.COM

NOTICE TO PLANHOLDER:
 THE UTILITY LOCATIONS AND OTHER FACILITIES SHOWN ON THIS DRAWING ARE REPRESENTATIVE OF INFORMATION FURNISHED BY OTHER PARTIES. IT IS INTENDED FOR REFERENCE ONLY. CONTRACTOR IS REQUIRED TO CONTACT 811 PRIOR TO STARTING CONSTRUCTION AND IS BOUND BY THEIR LAWS AND ORDINANCES.

NOTES TO CONTRACTOR:
 CONTRACTOR TO POT-HOLE AND LOCATE ALL UTILITIES PRIOR TO STARTING CONSTRUCTION.

REVISIONS		PROJECT TOTALS	
-	-	NEW HANDHOLES 17X30	-
-	-	NEW HANDHOLES 22"	-
-	-	NEW FLOWER POTS	-
-	-	TOTAL NEW CONTACT (L.F.)	706'
-	-	TOTAL BORE (L.F.)	-
-	-	TOTAL TRENCH (L.F.)	-
-	-	TOTAL ASPHALT R&R (SQ.FT.)	-
-	-	CONCRETE R&R (SQ.FT.)	-



Utilities One

Call at least two full working days before you begin excavation.

811 Know what's below. Call 811 before you dig.

SHEET NO. 1 OF 14
 DATE: 11/21/2024
 T/R/S:T:19N R:17E S:34

PROJECT NAME: FIBTHP001-1
 DRAFTER: OLEG MELNIC